



< 500 l/min
(8.3 l/sec)



100% PUR
(soft Ester)



-20°C - +60°C



25 m

Lightweight portable reel

Features

Lightweight design

Ultraflexible 100% PU braided hose 9,5 x 13 mm (3/8")
for standard tools

Hose and sealings approved for -30° C

Wide stand base with rubber buffers

Twice the airflow of comparable handreels

Wall mount adapter included

Customer benefits

Easy lifting around and no gadgets that fail quickly

Best handling for 25 meters length

Winter & summer outdoor proof

Firm stand even on sloping surfaces

High productivity also with large nailers

Quick detachable system for service trucks

Applications

In- and outdoor for carpenters

Any Nailers and Staplers up to 500 l/min (10x14)



Wall detach system for service car placement




Kink protection to ensure full-flow at any time




Ball-bearing swivel for best ergonomics

Dimensions

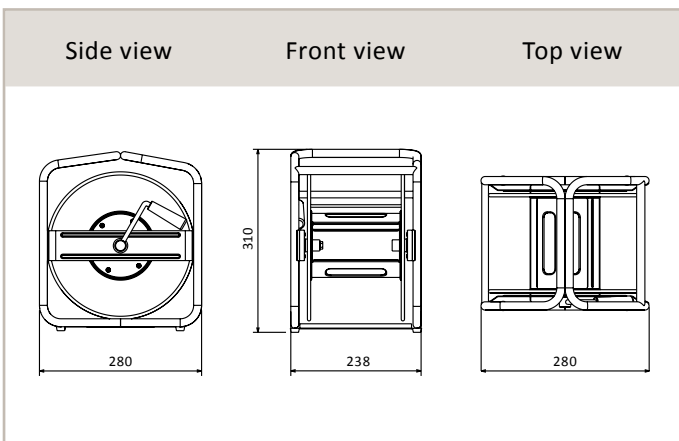

Airflow chart

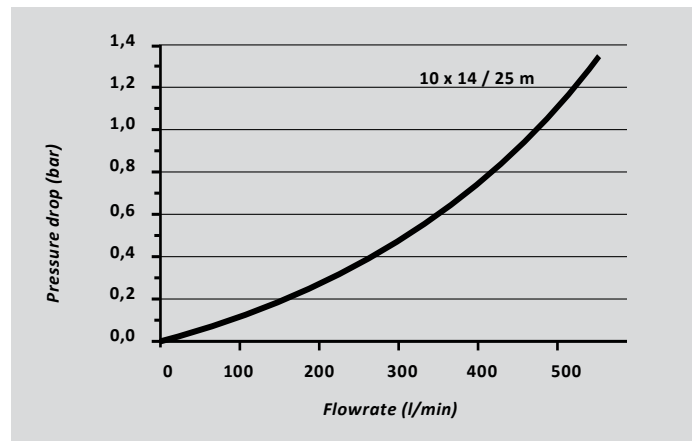

PORTABLE REEL SERIES 301 - Versions and technical data

	Hose Length	Hose \varnothing mm	Lead Hose	Hose Material	Temperature & Pressure	Thread In/Out	Weight	Part Number
Standard pressure	25 m (82 ft)	9.5 x 13 (3/8")	1.5 m (5 ft)	Ester-PUR (100%)	- 20°C to +60°C 16 bar (232 psi)	1/4" BSPP Outlet w/swivel	5.95 kg (15 lbs)	301.1000